


Unheated

The RMP is a low-profile, single-speed air curtain designed for insect control. It's durable stainless steel case combined with a compact design makes it ideal for restaurants and concession stands where mounting space above the door, window, or opening is limited.

Key Design Features

- 304 stainless steel.
- 8 1/2 inches high x 13 1/2 inches deep.
- 1/5 HP motor(s).
- Fully assembled and factory tested.
- ETL listed.
ETL Sanitation Certified to NSF Standard 37.
USDA Compliant.
FDA Compliant.
- Made in the USA.

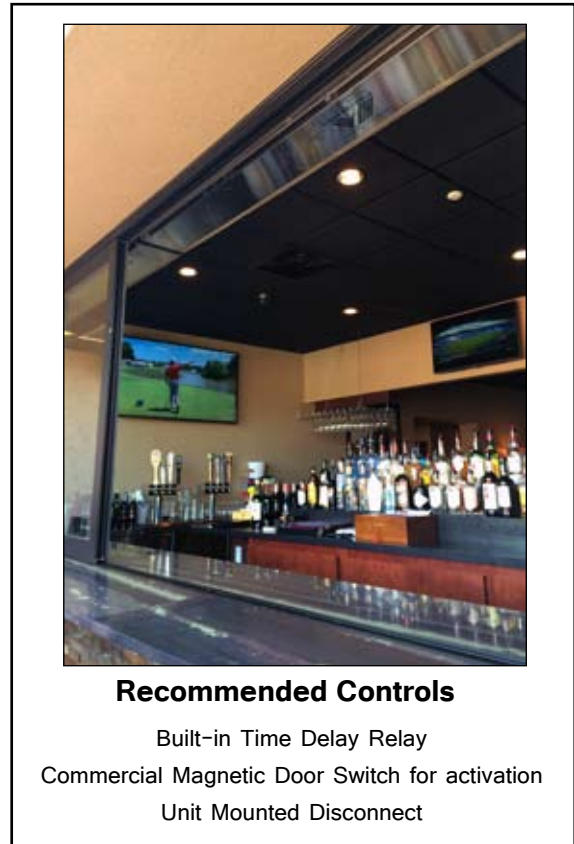

Recommended Controls

Built-in Time Delay Relay
Commercial Magnetic Door Switch for activation
Unit Mounted Disconnect

Sound level: High speed: **53 dBA** (Measured 10 ft. from unit in a free field based on a one motor unit)

	RMP-1-30	RMP-1-36	RMP-1-42	RMP-1-48	RMP-1-60	RMP-2-72	RMP-2-84	RMP-2-96	RMP-2-108	RMP-2-120
Nozzle width (in.)	29	35	41	47	59	71	83	95	107	117
Max. FPM at nozzle	3050	3050	3050	3050	3050	3050	3050	3050	3050	3050
Avg. FPM	2045	2142	2086	2045	1928	2142	2087	2045	2142	2103
CFM @ Nozzle	897	1178	1339	1500	1767	2356	2678	3005	3534	3856
Outlet Velocity Uniformity	92%	95%	95%	92%	92%	95%	95%	95%	95%	95%
Number of motors	1	1	1	1	1	2	2	2	2	2
Motor HP	1/5	1/5	1/5	1/5	1/5	1/5	1/5	1/5	1/5	1/5
Weight - Unheated	42	53	60	67	85	94	105	114	130	141

Single Phase Motor Voltage Available: 120 208/230 480 575
Amp Draw Per Motor: 4.4 2.0 1.1 0.9



MADE IN THE USA

