




XPA



The XPA model is recommended for X-tremely high doors of up to 50 feet high. The XPA has top and bottom access panels to replace or service motors or blowers without lowering entire unit or bottom half of unit.

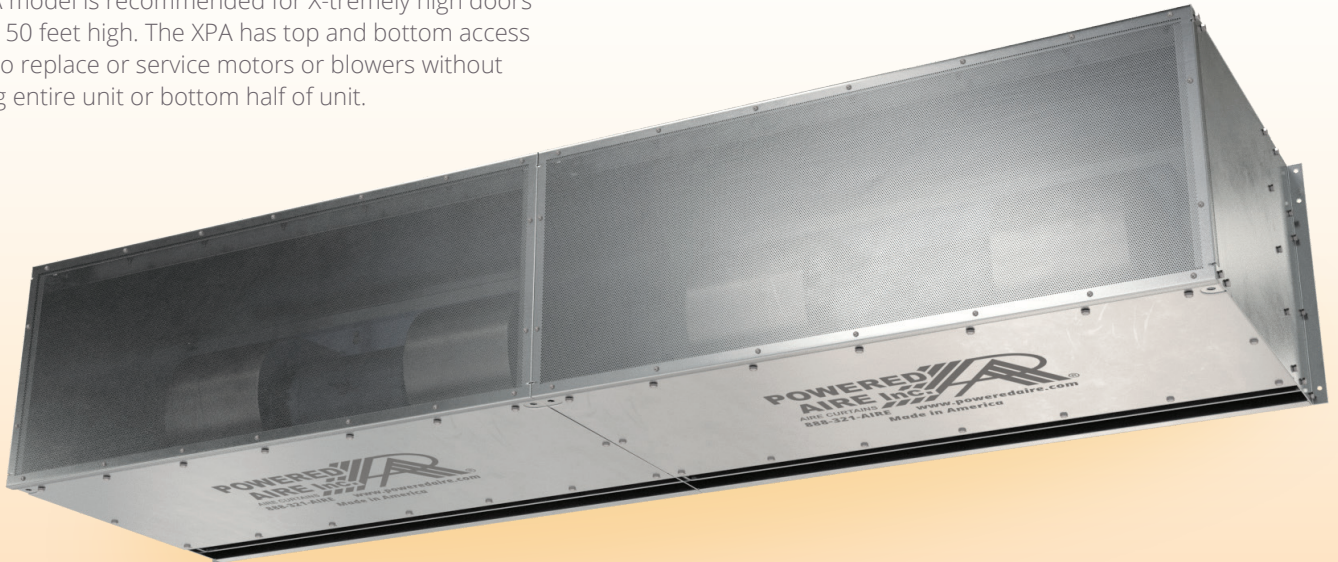

AT A GLANCE

Single Incremental Widths

6' to 30'

Max Installation Height

50'

Heavy Duty Motors

20 HP

KEY DESIGN FEATURES

- Outer cabinet constructed of 16-gauge 304 stainless steel with #3 finish
- 20 HP TEAO (Totally Enclosed Air Over) direct-drive single-speed motor(s)
- High-efficiency discharge plenum with adjustable air foil vane (+/-20°)
- Top and bottom access panels for servicing and removal of motor-blower assembly
- NEMA 12 control panel with factory installed motor soft starter, overload relays, and control transformer

RECOMMENDED CONTROLS

- Activation by 24V magnetic door switch
- Toggle disconnect switch
- Hand/Off/Auto selector switch

