



ECC-HW



ECC-ST

3.2.0

ECC-HW/ST



ABOVE CEILING

The ECC model air curtain is specifically designed to be dropped into the ceiling above customer entryways where a standard air curtain cannot be exposed.

OPTIONS

HEATING

- Hot WaterECC-HW
- SteamECC-ST
- Unheatedpg 19
- Electric.pg 19

FILTER

½" cleanable

GRILLE COLOR

The white grille is standard with this model.
Consult factory for custom color or metal.



AT A GLANCE

Single Incremental Widths

3' to 12'

Max Installation Height

14'

Heavy Duty Motors

¾ HP


KEY DESIGN FEATURES

- Heavy duty ¾ HP EC motors. 1650 rpm on high speed.
- 2:1 turndown ratio when used with optional speed dial.
- Galvanized fans.
- White powder coated decorative intake grille
- High efficiency discharge plenum ensures that air being discharged fills the entire width and height of the opening. This also lowers the unit's operational sound level.
- Steam or hot water coil mounted to intake of air curtain. Coil consists of 5/8 in. O.D. copper tubes and aluminum fins. Coils certified to ARI standard 410.
- Includes control panel

RECOMMENDED CONTROLS

- Variable speed dial
- Magnetic Door Switch for activation
- Time Delay Relay

MEASURING EFFICIENCY

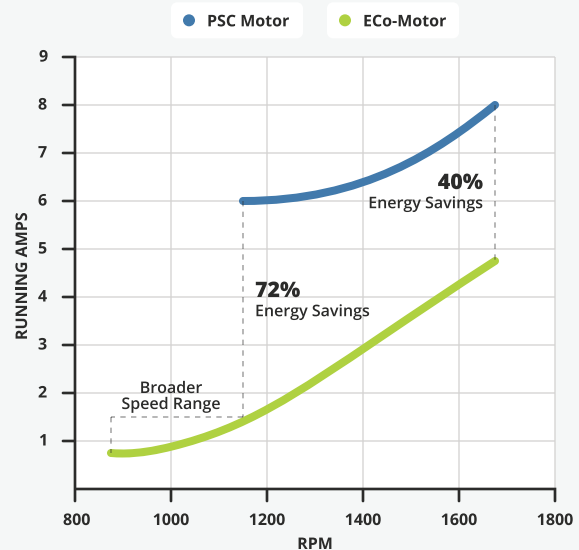

Data based on ¾ HP @ 120V