


SmartTouch PRO Controller

Remote Mounting Instructions

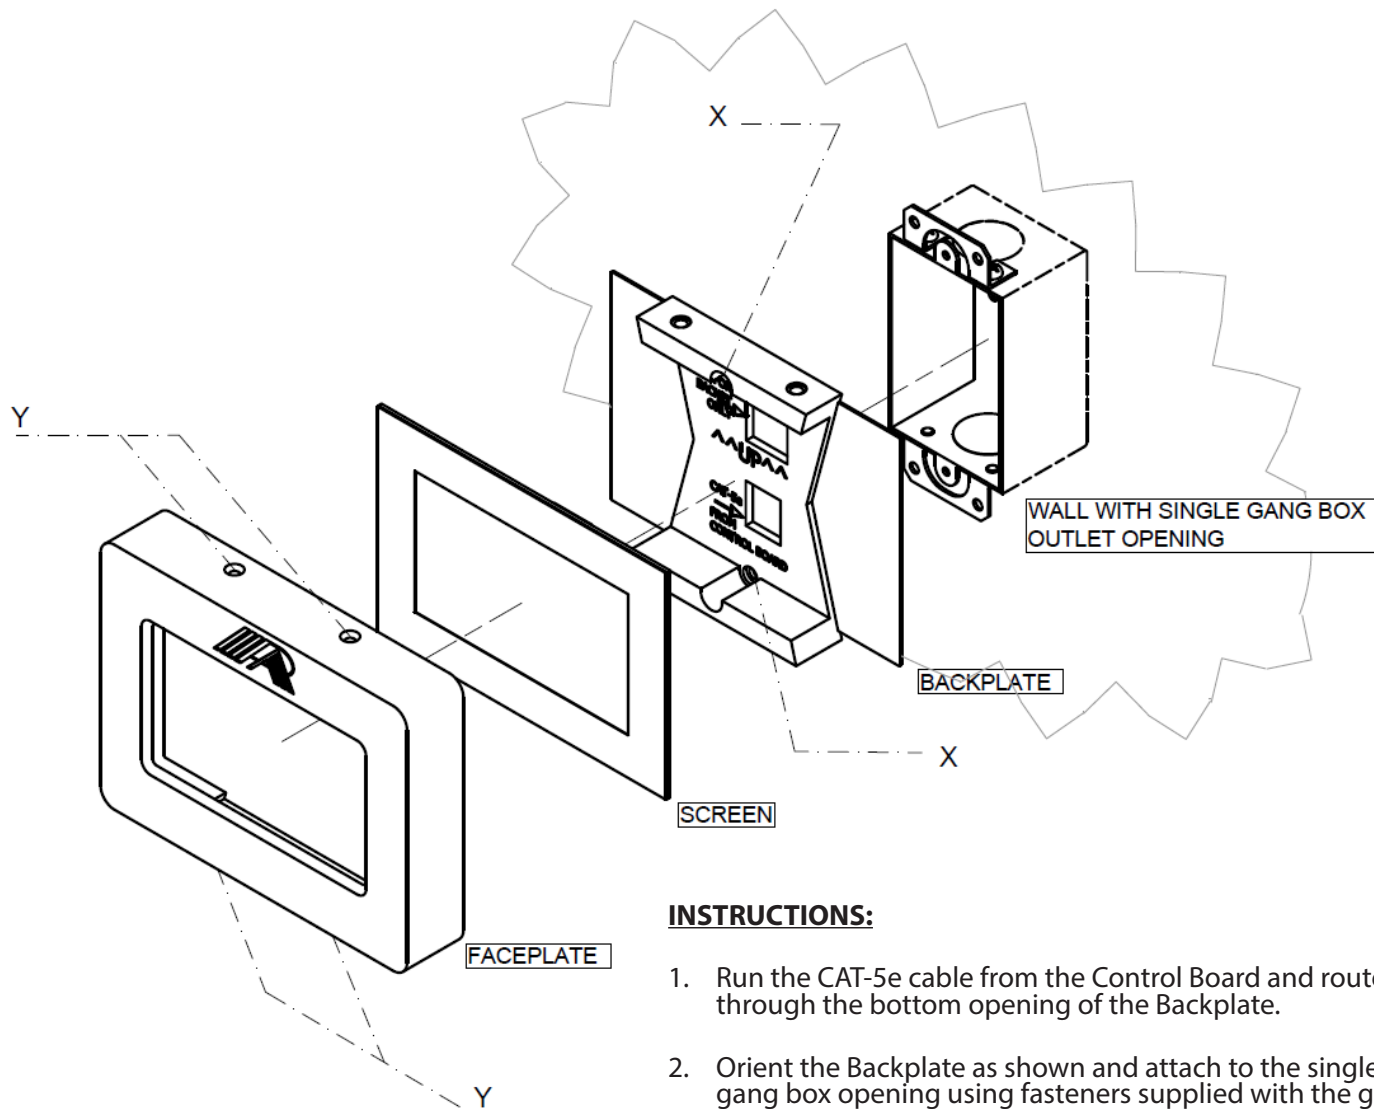

INSTRUCTIONS:

1. Run the CAT-5e cable from the Control Board and route it through the bottom opening of the Backplate.
2. Orient the Backplate as shown and attach to the single gang box opening using fasteners supplied with the gang box, at spots 'X'.
3. Place the Smart Touch screen, display side out on the back side of the Faceplate.
4. Plug the CAT-5e cable into the back of the Smart Touch screen.
5. Carefully line the Faceplate & Screen assembly with the mounted Backplate.
6. Secure the Faceplate on the Backplate using (4) 4-40 Philips head screws at spots 'Y'.

QUESTIONS & TECHNICAL SUPPORT AVAILABLE. CONTACT US DIRECTLY:

Phone Support
1-888-321-Aire (2473)

Email Support & Service
CustomerService@PoweredAire.com

Sales Questions
Sales@PoweredAire.com