


Non-Programmable Thermostat

Technical Data

PRODUCT IMAGES



DIMENSIONS

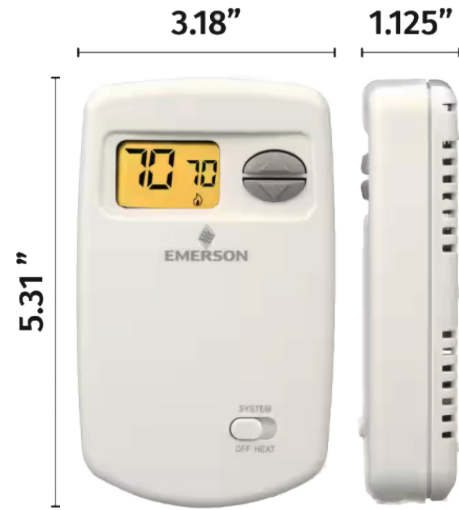

FEATURES AND KEY PRODUCT INFORMATION

- ▶ White Plastic Casing
- ▶ Backlit LED Screen
- ▶ Selectable Celsius or Fahrenheit temperature display
- ▶ Includes B/O terminals
- ▶ Single Stage
- ▶ System Off/Heat Switch to enable or disable heating
- ▶ 24V power with battery backup (2 AAA batteries Included)
- ▶ RH and W terminals

SPECIFICATIONS

Electrical Rating	NEC Class II, 50/60 Hz
Display Temperature Range	32° F to +99°F (0° C to 37° C)
Setpoint Range	45° F to 90° F (7° C to 32° C)
Operating Ambient	32° F to +105°F (0° C to +41°C)
Operating Humidity	90% non-condensing max
Rated Differentials	Fast: 0.8° F / Slow: 1.5° F
Shipping Temperature	-4° F to +150° F (-20°C to +65°C)
Terminal Load	1.0 A per terminal / 1.5 A per maximum all terminals combined

QUESTIONS & TECHNICAL SUPPORT AVAILABLE. CONTACT US DIRECTLY:

Phone Support
1-888-321-Aire (2473)

Email Support & Service
CustomerService@PoweredAire.com

Sales Questions
Sales@PoweredAire.com