



CLD



CLD-E

3.3.0



LIGHT DUTY

ABOVE CEILING



The Chameleon Light Duty (CLD) is specifically designed to be dropped into the ceiling above customer entry ways where a standard air curtain cannot be exposed. Like the CED, the Chameleon also has the least objectionable airflow.

OPTIONS

ELECTRIC HEAT


Electric.....CLD-E
Hot Water.....pg 49
Steampg 49

FILTER

½" Cleanable

CUSTOM GRILLES

The white grille is standard with this model.
Consult factory for custom color or metal.

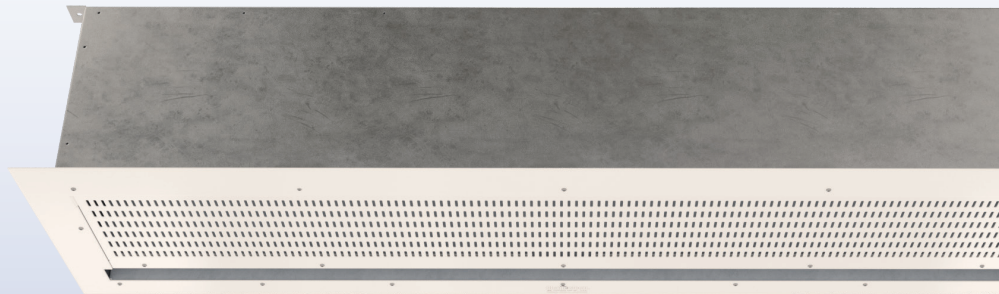

AT A GLANCE

Single Incremental Widths

3' to 12'

Max Installation Height

11'

Heavy Duty Motors

½ HP

KEY DESIGN FEATURES

- 18 gauge galvanized steel case installed above the ceiling.
- Heavy duty ½ HP motors. 1075 rpm each. 50/60 cycle. Dual speed.
- Galvanized fans.
- White powder coated decorative intake grille
- High efficiency discharge plenum ensures that air being discharged fills the entire width and height of the opening. This also lowers the unit's operational sound level.
- Directional air foil vane factory set to facilitate deflection of air stream +/-20 degrees.
- Includes control panel

RECOMMENDED CONTROLS

- ON / OFF switch
- Thermostat, if electrically heated (Model CLD-E)
- Magnetic door switch for activation
- Time delay relay

